



15 YEARS LONGER THAN INDUSTRY STANDARD OF 10 YEARS



LG NeON[®] 2 BiFacial

LG330/335/340N1T-V5

19.3%/19.6%/19.8% efficiency and boost power up to 30% in optimal install conditions

Awards Received By LG Solar™



THE NeON[®] 2 BiFacial - 340W

The new LG NeON[®] 2 BiFacial has seen many improvements to earlier LG panels, from longer warranties, higher efficiency and lower degradation.

The LG NeON[®] 2 BiFacial module combines the NeON[®] 2 double sided CELLO cell with a clear backsheets. This enables the panel to generate power from both the front and rear of the module. Additional power is generated from the light that is reflected off the roof or ground surface underneath being absorbed by the rear side of the cells of the module. The NeON[®] 2 BiFacial 340W also adopts LG's unique CELLO technology with 12 multi wire busbars to reduce current resistance, enhancing power output and panel reliability.

Higher output via tilt frames



In optimised tilt frame installations the 340W BiFacial panel can achieve close to 30% more output from light absorption via the rear of the double sided cell. Higher reflective backgrounds and raised installation environments combined will increase the output far beyond that expected from a conventional monofacial panel.

More Power per Square Metre



LG NeON[®] 2 BiFacial 340W are a similar size to many conventional 300W panels. In internal LG tilt frame performance tests the LG NeON[®] 2 BiFacial 340W panel can produce more than the name plate in optimised installation conditions. This means you can get more power per square meter from the NeON[®] 2 BiFacial than many panels on the Australian and NZ markets.

25 Years Product Warranty (Parts & Labour)



The LG product warranty is 15 years longer than the industry standard 10 years and covers 25 years. The Warranty is held by LG Electronics Australia and New Zealand. The warranty includes replacement labour and transport.

Improved 25 Year Performance Warranty



The initial degradation of the module has been improved from -3% to -2%, in the 1st year and the annual rate of degradation has fallen from -0.7%/year to -0.35%/ year thereafter. This brings an 89.6% warranted output after 25 years, compared to 80.2% for many competing panels.

LG NeON[®] 2 BiFacial

ABOUT LG ELECTRONICS

LG Electronics embarked on a solar energy research programme in 1985, using our vast experience in semi-conductors, chemistry and electronics. In 2013, 2015 and 2016 the LG NeON[®] range won the acclaimed Intersolar Award in Germany.

The NeON 2 BiFacial represents an innovative development of the LG NeON[®] range and this particular model won the 2016 Intersolar Award in Germany, which demonstrates LG Solar's lead in innovation and commitment to the renewable energy industry. With over 200 lesser known brand panels selling in Australia, LG solar panels offer a peace of mind solution.

KEY FEATURES

 <p>Proven Field Performance</p> <p>LG has been involved in a number of comparison tests of the LG panels against many other brand panels. LG NeON[®] 2 BiFacial models are consistently among the best performing in these tests.</p>	 <p>Low LID</p> <p>The N-type doping of the NeON[®] cells results in extremely low Light Induced Degradation (LID) when compared with the standard P-type cells. This means more electricity generation over the life of the panel, as the panel degrades less.</p>
 <p>Corrosion Resistance Certification</p> <p>LG NeON[®] 2 BiFacial panels can be installed confidently right up to the coastline. The panels have received certification for Salt Mist Corrosion to maximum severity 6 and Ammonia Resistance.</p>	 <p>Extensive Testing Programme</p> <p>LG solar panels are tested up to 2 times the International Standards at our in-house testing laboratories, ensuring a very robust and longer lasting solar module.</p>
 <p>Strict Quality Control Reliable for the Future</p> <p>The quality control of LG world-class solar production is monitored and improved to Six Sigma quality control standards, which includes 500+ monitoring points to effectively maintain and improve our uncompromising quality.</p>	 <p>High Wind Load Resistance</p> <p>LG panels have a strong double walled frame. When it comes to wind forces (rear load) our panel under test withstood a wind load of 4000Pa.</p>
 <p>Multi Anti-reflective Coatings Increase Output</p> <p>LG Solar™ is using an anti-reflective coating on the panels glass as well as on the cell surface to ensure more light is absorbed in the panel and not reflected. More absorbed light means more electricity generation.</p>	 <p>Double-Sided Cell Structure</p> <p>In conventional panels the cells produce energy from the front only. The NeON[®] 2 Cell produces energy from both the front as well as the back of the cell. This innovative technology allows the absorption of light from behind the panel which raises the panel's electricity output.</p>
 <p>Improved High Temperature Performance</p> <p>Solar panels slowly lose ability to generate power as they get hotter. LG NeON[®] 2 BiFacial, has an improved temperature co-efficient to standard modules, which means in hot weather LG NeON[®] 2 panels will deliver higher output.</p>	 <p>Anti PID Technology for Yield Security</p> <p>PID (Potential Induced Degradation) affects the long term ability of panels to produce high level electricity output. LG panels have anti PID technology and have been successfully tested by leading third party laboratories regarding PID resistance.</p>
 <p>"CELLO" Technology Increases Power</p> <p>"CELLO" Multi wire busbar cell technology lowers electrical resistance and increases panel efficiency, giving more power per panel and provides a more uniform look to the panel.</p>	 <p>Automated Production in South Korea</p> <p>All LG solar panels are manufactured in a custom designed and fully automated production line by LG in Gumi, South Korea ensuring extremely low tolerances. This means great quality and build consistency between panels.</p>


LG NeON[®] 2 *BiFacial* – INNOVATIVE, CLEVER, EFFICIENT.

LG NeON[®] 2 *BiFacial* solar modules now offer even more performance. Featuring a classy design with a total of 60 cells, it is LG's latest panel. LG has extended its product warranty from 10 for many other competitor panels to 25 years and improving its linear performance guarantee to at least 89.6% of nominal output at 25 years. The LG NeON[®] 2 *BiFacial* is an excellent choice for high performing long lasting solar systems.

LOCAL WARRANTY, GLOBAL STRENGTH


LG Solar™ is part of LG Electronics Inc., a global and financially strong company, with over 50 years of experience in technology. Good to know: LG Electronics Australia Pty Ltd is the warrantor in Australia and NZ for your solar modules. So LG support, via offices in every Australian mainland state and NZ and through our 70 strong Australia wide dealer network, is only a phone call away.

The Warrantor's 2018 Global Sales in Billions of US Dollars

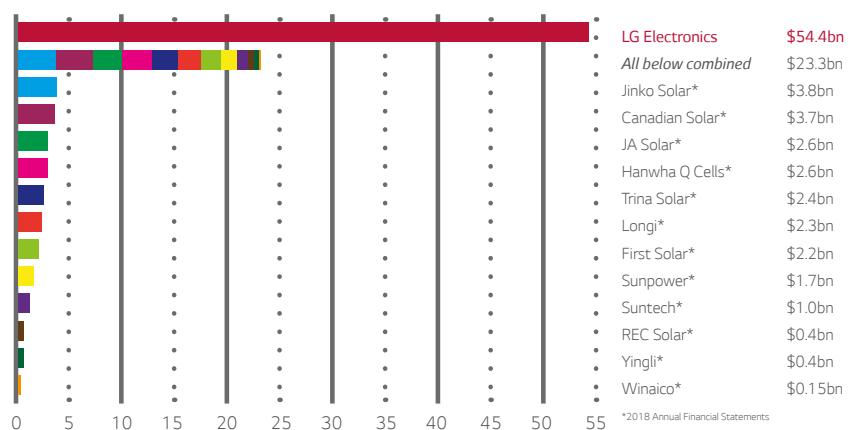


HIGHER OUTPUT, HIGHER YIELD

In the case of the NeON[®] 2 *BiFacial* the transparent back sheet allows reflected light to reach the rear of the cell increasing electricity production by close to 30% over conventional single sided cell panels.

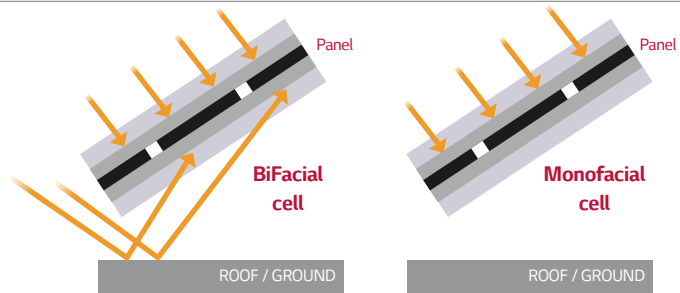

EXCELLENT QUALITY, THOROUGHLY TESTED

You can rely on LG. We test our products with at least double the intensity specified in the IEC standard. (International Quality Solar Standard).

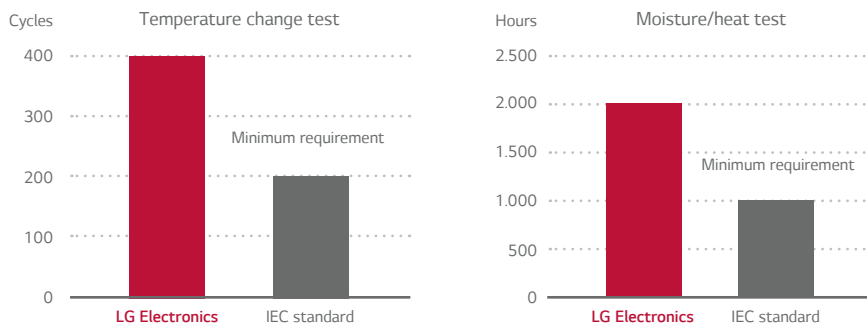

Awards Received By LG Solar™



Our panel range have won a string of International Awards.

POWERFUL DESIGN, GUARANTEED ROBUST

With reinforced frame design, the LG NeON[®] 2 can under test withstand a front load of 5400 Pa which is the equivalent of 943 kg over the size of the panel. The rear load/wind load of the panel under test is 4000 Pa.



LG offers a 15 year longer product warranty for parts and labour than many competitors 10 years to an impressive 25 years.

10yrs + 15yrs



LG NeON[®]2 BiFacial

Mechanical Properties

Cells	6 x 10
Cell Vendor	LG
Cell Type	Monocrystalline / N-type
Cell Dimensions	161.7 x 161.7 mm
# of Busbar	12 (Multi Wire Busbar)
Dimensions (L x W x H)	1686 x 1016 x 40 mm
Front Load (test)	5400 Pa
Rear Load (test)	4000 Pa
Weight	17.1 kg
Connector Type	Genuine MC4, IP68 (Male: PV-KST4) (Female: PV-KBT4)
Junction Box	IP68 with 3 bypass diodes
Length of Cables	2 x 1000 mm
Front cover	High transmission tempered glass
Frame	Anodised aluminum

Certifications and Warranty


Certifications	IEC 61215-1/-1-1/2:2016, IEC 61730-1/2:2016, UL1703 ISO 9001, ISO 14001, ISO 50001
	OHSAS 18001
	IEC 61701:2012 Severity 6 (Salt Mist Corrosion Test) IEC 62716:2013 (Ammonia Test)
Module Fire Rating	Type 1 (UL 1703), Class C (ULC/ORD C 1703, IEC 61730)
Product Warranty	25 Years
Output Warranty of Pmax (Measurement Tolerance ± 3%)	Linear Warranty ¹

¹ 1) After 1st year: 98%, 2) After 2nd year: 0.33% annual degradation, 3) 25 years: 89.6%.


Temperature Characteristics

NMOT	42 ± 3 °C
Pmax	-0.36 %/°C
Voc	-0.27 %/°C
Isc	0.03 %/°C

Current – Voltage characteristics at various irradiance levels

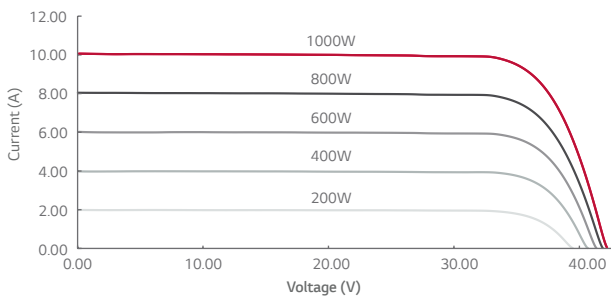

Current – Voltage characteristics at various cell temperatures

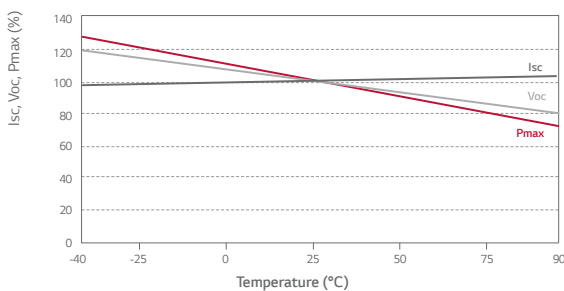

Electrical Properties (STC²)

Module Type	LG330N1T-V5			LG335N1T-V5			LG340N1T-V5		
	STC *	BiFi 100 **	BiFi 200 **	STC *	BiFi 100 **	BiFi 200 **	STC *	BiFi 100 **	BiFi 200 **
Maximum Power Pmax (W)	330	350	370	335	355	375	340	360	380
MPP Voltage Vmpp (V)	33.8	33.8	33.8	34.1	34.1	34.1	34.4	34.4	34.4
MPP Current Imp (A)	9.77	10.36	10.95	9.83	10.41	11.00	9.89	10.47	11.05
Open Circuit Voltage Voc (V)	40.6	40.6	40.6	40.7	40.7	40.7	40.8	40.8	40.8
Short Circuit Current Isc (A)	10.30	10.92	11.54	10.34	10.95	11.57	10.38	10.98	11.59
Module Efficiency (%)	19.3	20.4	21.6	19.6	20.7	21.9	19.8	21.0	22.2
Operating Temperature (°C)	-40 ~ +90								
Maximum System Voltage (V)	1000								
Maximum Series Fuse Rating (A)	20								
Pmax Bifaciality Coefficient (%)	70 ± 5								
Power Tolerance (%)	0 ~ +3								


* STC (Standard Test Condition): Irradiance 1000 W/m², Cell Temperature 25 °C, AM 1.5, Measure Tolerance: ± 3%
** The electrical properties of BiFi100 and BiFi200 measure under the front side irradiance 1000W/m² + (100W/m² or 200W/m²) BiFi. Use 100W/m² for BiFi100 and 200W/m² for BiFi200.

Electrical Properties (NMOT)

Module Type	LG330N1T-V5			LG335N1T-V5			LG340N1T-V5		
	STC	BiFi100	BiFi200	STC	BiFi100	BiFi200	STC	BiFi100	BiFi200
Maximum Power Pmax (W)	257	262	277	251	266	281	255	270	285
MPP Voltage Vmpp (V)	31.7	31.7	31.7	32.0	32.0	32.0	32.3	32.3	32.3
MPP Current Imp (A)	7.80	8.26	8.74	7.84	8.31	8.78	7.89	8.35	8.81
Open Circuit Voltage Voc (V)	38.1	38.1	38.1	38.2	38.2	38.2	38.3	38.3	38.3
Short Circuit Current Isc (A)	8.28	8.77	9.27	8.31	8.80	9.29	8.34	8.82	9.31

* NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s, Spectrum AM 1.5

Dimensions (mm)

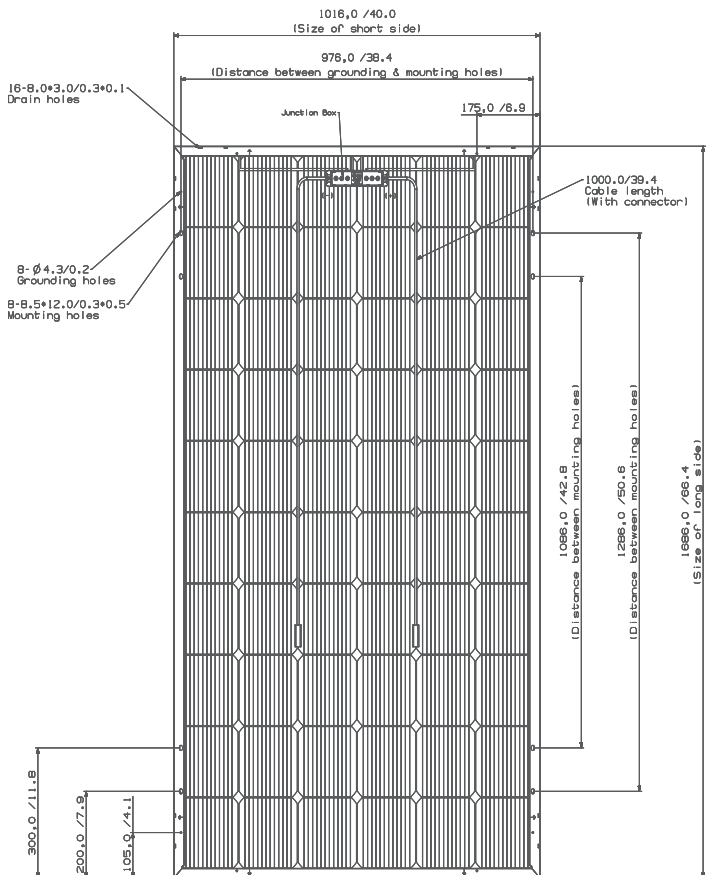

LG Electronics Australia Pty Ltd
Solar Business Group
2 Wonderland Drive, Eastern Creek, NSW 2766
Ph: 1300 152 179
E-Mail: solar.sales@lge.com.au
Web: lgenery.com.au

LG Electronics Inc.
Solar Business Division
Twin Building, Western Tower, 11F,
128, Yeoui-daero, Yeongdeungpo-gu,
Seoul, 07336, Korea
www.lg.com/global/business

Product specifications are subject to change without prior notice.
Date: 08/2019

Copyright © 2019 LG Electronics.
All rights reserved.

